

# PS200 HR-07

## Solar submersible pump system for 4" wells

### Applications

- Drinking water supply
- Pond management
- Irrigation
- Livestock watering
- Pressurizing systems

### Characteristics

- Fast, failure-free installation
- Excellent serviceability
- High reliability and life expectancy
- Short Return of Investment (ROI) cycle
- Lower Total Cost of Ownership (TCO)

### Technical data

Total dynamic head	max. 40 m
Flow rate	max. 1,3 m³/h
Vmp*	> 34 V
Voc	max. 100 V

### Standards

CE 2006/42/EC, 2004/108/EC, 2006/95/EC

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.



### Components

#### Controller: PS200

- Controlling and monitoring
- Control inputs for dry running protection, remote control etc.
- Protected against reverse polarity, overload and overtemperature
- Integrated MPPT (Maximum Power Point Tracker)
- Low voltage disconnect for battery operation

#### Motor: ECDRIVE 600-HR

- Maintenance-free brushless DC motor
- Water filled
- No electronics in the motor
- Submersion max. 250 m, IP68

#### Pump end: PE HR-07\*\*

- High reliability and life expectancy
- Non-return valve
- Premium materials
- Optional: dry running protection




## PS200 HR-07

Solar submersible pump system for 4" wells

### Pump chart


Vmp\* > 34 V

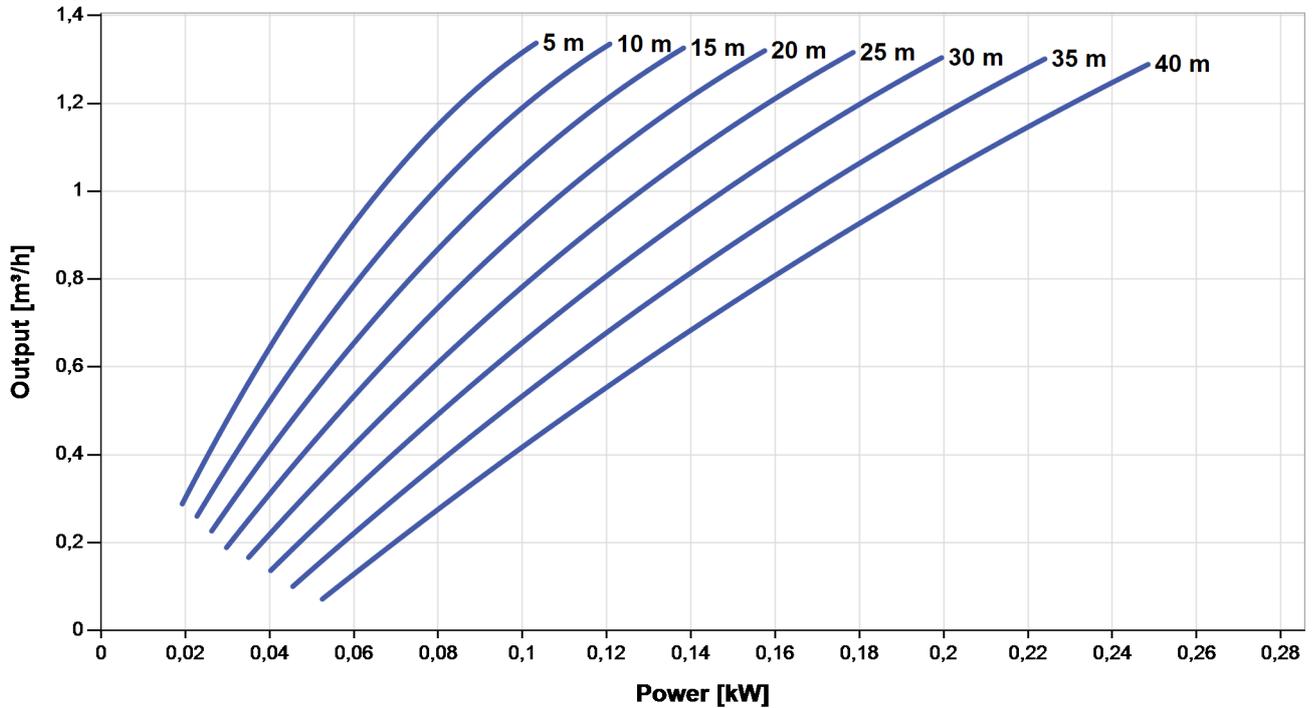

### Dimensions and weights


#### Controller

H = 276 mm  
 H1 = 248 mm  
 H2 = 208 mm  
 W = 225 mm  
 W1 = 188 mm  
 D = 108 mm  
 D1 = 100 mm

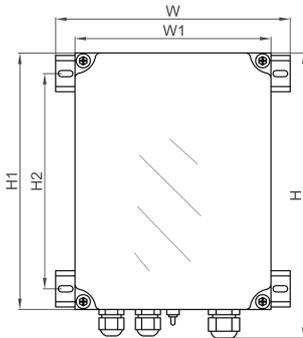

#### Pump unit\*\*\*

A = 771 mm  
 B = 185 mm  
 C = 586 mm  
 D = 96 mm  
 E = 147 mm  
 S = 1,25 in

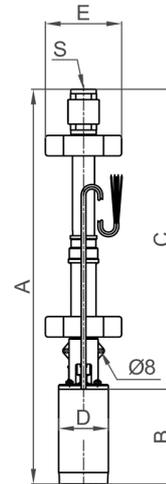

	Net weight
Controller	1,2 kg
Pump unit	12 kg
Motor	7,0 kg
Pump end	4,5 kg

\*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

\*\*Specify temperature range on order

\*\*\*By cutting the rubber spacers the diameter can be adjusted between 6" and 4" wells.

BERNT LORENTZ GmbH & Co. KG

Kroegerskoppel 7, 24558 Henstedt-Ulzburg, Germany,  
 Tel +49 (0)4193 7548-0, Fax -29, www.lorentz.de



Created by LORENTZ COMPASS 3.0

All specifications and information are given with good intent, errors are possible and products may be subject to change without notice. Pictures may differ from actual products depending on local market requirements and regulations.